




CHAPEL ENGINEERING

Sales, service and repairs to all makes of hand pallet trucks

CHAPEL PLATFORM STACKER

PS Series

- Conforms to EN 1757-1:2001
- Simple and easy to operate
 - Lifting movement via collapsible foot pedal
 - Sensitive lowering valve
 - Hand push drive
 - Overload protection via pressure valve
- Safe operation and secure
 - Stable chassis with 2 frame rollers and 2 steering rollers
- Long service life
 - Robust construction
 - Hard chromium plated frame and ram
- Effortless movement
 - Ball bearing rollers
 - Polyurethane rollers

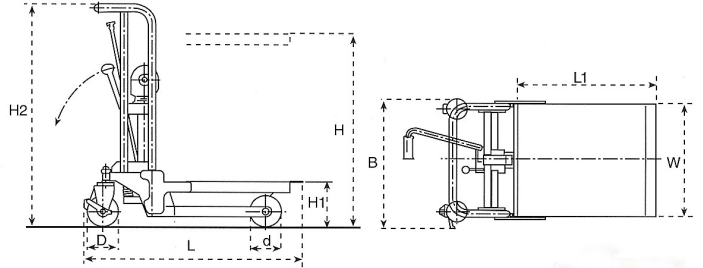

Model		PS4085	PS4120	PS4150
Capacity	(kg)	400	400	400
Platform Height Max.	H (mm)	850	1200	1500
Platform Height Min.	H1 (mm)	200	200	200
Platform Length	L1 (mm)	650	650	650
Platform Width	W (mm)	550	550	550
Total Width	B (mm)	590	590	590
Total Length	L (mm)	1040	1040	1040
Total Height	H2 (mm)	970	1310	1610
Steering Rollers-diameter	D (mm)	Φ 150	Φ 150	Φ 150
Frame Rollers-diameter	d (mm)	Φ 150	Φ 150	Φ 150
Pump Strokes to Max. Height		30	45	58
Net Weight	(kg)	72	78	83



CHAPEL FORK STACKER

PF/PJ Series

- Conforms to EN 1757-1:2001

Model	Fixed Fork	PF4085	PF4120	PF4150
Capacity	(kg)	400	400	400
Fork Height Max.	(mm)	850	1200	1500
Fork Height Min.	(mm)	85	85	85
Fork Length	(mm)	650	650	650
Fixed Fork Width(PF series)	(mm)	550	550	550
Adjustable Fork Width(PJ series)	(mm)	235-500	235-500	235-500
Load Roller	(mm)	Φ 75	Φ 75	Φ 75
Steering Wheel	(mm)	Φ 125	Φ 125	Φ 125
Pump Strokes to Max. Height		35	50	63
Overall Height	(mm)	1060	1410	1710
Overall Width	(mm)	590	590	590
Overall Length	(mm)	1040	1040	1040
Net Weight (kg)	PF series	70	76	82
	PJ series	75	81	85
Platform, option		LP20		



Option platform
Model: LP20

